

CUSTOMER : \_\_\_\_\_

DATE: 2025/5/5

## SPECIFICATION


<p><b>Model:</b> QIW-45D4</p> <p><b>Color:</b> White <input checked="" type="checkbox"/> Black <input type="checkbox"/></p> <p><b>Product:</b> FAST CHARGER</p> <p><b>Spec No:</b> Q5-004</p> <p><b>Version:</b> A1</p>	<p><b>Type:</b> Interchangeable</p> <p><b>AC Plug:</b> Replaceable Plug (EU+UK+AU)</p> <p><b>Input:</b> 100-240V~50/60Hz 1.5A Max</p> <p><b>Output:</b> PD+PPS (45W Max)</p> <p><b>USB Ports:</b> USB A+USB-C</p>
---	---

<b>Receiver's stamp or signature</b>

**PLEASE APPROVE & RETURN BEFORE: 2025/5/20**  
**OR WE WOULD REGARD IT BEEN CONFIRMED.**

RESPONSIBLE	APPROVED	ISSUED
Thomas	Aiwei	Anni

**ISSUES STAMP**



**Revised History**

No.	Revised Date	Description	Approved	Issued

**QIW Industrial Co.,Ltd.**

**CHINA:**

Http://www.qiw.com

E-Mail: qiw@qiw.com

TEL : +86-755-8980 9888

FAX : +86-755-8983 7166

**HONG KONG:**

Http://www.qiw.com.cn

E-Mail: qiw@qiw.com.cn

TEL : +852-6952 9522

FAX : +852-3171 2350



PRODUCT	FAST CHARGER	SHEET NO.	1 OF 4
		VERSION:	A1
MODEL NO.	QIW-45D4	SPEC NO.	Q5-004

1.INPUT REQUIREMENT

2.OUTPUT SPECIFICATION

3.MECHANICAL

4.RELIABILITY

5.ENVIRONMENT

6.OUTLOOKING

7.SAFETY

8.QC CHECK

9.DIMENSION

10.LABEL

11.PACKING

<b>QIW® 奇旺</b>	PRODUCT	FAST CHARGER	SHEET NO.	2 OF 4
	MODEL NO.	QIW-45D4	VERSION:	A1
			SPEC NO.	Q5-004

### 1.INPUT REQUIREMENT

ITEM	SPECIFICATION	MIN	TYP.	MAX
NORMAL AC INPUT VOLTAGE	SINGLE PHASE	100Vac	110Vac/220Vac	240Vac
AC INPUT VOLTAGE RANGE	SINGLE PHASE	90Vac	110Vac/220Vac	264Vac
AC INPUT FREQUENCY	SINGLE PHASE	47Hz	50/60Hz	63Hz
AC INPUT CURRENT	TYPICAL INPUT VOLTAGE& OUTPUT AT FULL LOAD.			1.5A
NO LOAD POWER	AT 115VAC/230VAC			0.21W
EFFICIENCY	TYPICAL INPUT VOLTAGE& OUTPUT AT FULL LOAD	86%		

### 2.OUTPUT SPECIFICATION

#### VOLTAGE OUTPUT CHARACTERISTICS OF EACH PORT

USB PORTS	OUTPUT	LOAD CONDITION		Load Regulation	Line Regulation	OCP
		Minimum Load	Nominal Load			
USB-C	5V	0A	3.0A	±5%	±5%	105%-135%
	9V	0A	3.0A	±5%	±5%	105%-135%
	12V	0A	3.0A	±5%	±5%	105%-135%
	15V	0A	3.0A	±5%	±5%	105%-135%
	20V	0A	2.25A	±5%	±5%	105%-135%
USB-A	5V	0A	3.0A	±5%	±5%	105%-135%
	9V	0A	3.0A	±5%	±5%	105%-135%
	12V	0A	2.5A	±5%	±5%	105%-135%
	15V	0A	2.0A	±5%	±5%	105%-135%
	20V	0A	1.5A	±5%	±5%	105%-135%


Note: If the output current exceeds 3A, the E-MARK chip needs to be included in the output Type-C line, otherwise only 3A can be output

#### COMBINED OUTPUT

##### USB-C+USB-A

USB-C	USB-A	TOTAL (Max)
45W	--	45W
--	30W	30W
25W	18W	43W

PPS: 5.0-11.0V==4.05A or 5.0-21.0V==2.25A(47.25W Max)

	PRODUCT	FAST CHARGER	SHEET NO.	3 OF 4
	MODEL NO.	QIW-45D4	VERSION:	A1
			SPEC NO.	Q5-004

### 3.MECHANICAL

ITEM	SPECIFICATION OR TEST CONDITION	ACCEPTANCE CRITERIA
BENDING TEST	NORMAL TEMPERATURE THE CORD SHALL WITHSTAND WEIGHT OF 200g, SWINGING FROM LEFT TO RIGHT AT AN ANGLE OF 60 DEG. 1000CYCLE TIMES MIN. S/R SHALL WITHSTAND WEIGHT OF 1N. SWINGING FROM LEFT TO RIGHT AT AN ANGLE OF 60DEG. 1000CYCLE TIMES MIN. BENDING SPEED 40CYCLE/MINUTE	NO SHORT CIRCUIT NO BREAKAGE OF THE CORD
VIBRATION	FREQUENCY RANGE:10~55Hz AMPLITUDE:1.5mm ACCELERATION: 1G SWEEP 1 MINUTE FOR X,Y,Z,AXIS EACH	THERE SHALL BENO ABNORMALITY ON THE APPEARNCE STRUCTURE AND OPERATING

### 4.RELIABILITY

ITEM	TEST CONDITION	ACCEPTANCE CRITERIA
TEMPERATURE UP WITH	TEST AT SURFACE OF THE CASE WITH TYPICAL	TEMPERATURE UP UNDER
TYPICAL LOAD	AC INPUT AND TYPICAL LOAD IN OUTPUT	35 DEGREES
	50/60Hz	
HI-POT TEST	INPUT TO OUTPUT GRADUALLY RAISED FROM 0 TO THE 3000Vac AND HELD AT THAT VALUE FOR 3S,5mA	NO DAMAGE
MTBF	TYPICAL INPUT&FULL LOAD , 25°C	30000 HOURS
LIFE	TYPICAL INPUT&FULL LOAD, 25°C	1YEARS ABOVE
BURN-IN	AT 25°C(±10°C),NORMAL INPUT VOLTAGE	2 HOURS

### 5.ENVIRONMENT

ITEM	SPECIFICATION OR TEST CONDITION	min.	typ.	max.
OPERATING TEMPERATURE		0°C		25°C
STORAGE TEMPERATURE		-20°C		70°C
OPERATING HUMIDITY	NON-CONDENSING	5%RH		90%RH
STORAGE HUMIDITY	NON-CONDENSING	5%RH		90%RH



<b>QIW®奇旺</b>	PRODUCT	FAST CHARGER	SHEET NO.	4 OF 4
			VERSION:	A1
	MODEL NO.	QIW-45D4	SPEC NO.	Q5-004

### 6.OUTLOOKING

DIMENSION :54.3(L)X54.8(W)X28.9(H)mm  
 WEIGHT :ABOUT 150g  
 AC INPUT TYPE :REPLACEABLE PLUG (EU+UK+AU)  
 DC OUTPUT TYPE :USB-A+USB-C

DC OUTPUT CABLE :N/A  
 INDICATION :LABEL  
 CASE MATERIAL :94V-0 ABS+PC  
 PCB MATERIAL :94V-0

### 7.SAFETY

COMPLY SAFETY STANDARDS	STANDARD	FILE NO.
ETL	UL 62368-1:2019 Ed.3+R:22Oct2021	5031785
cETL	CSA C22.2#62368-1:2019 Ed.3+U1	5031785
PSE	J62368-1(2023) J55032(H29)	JD 50675243
GS	EN IEC 62368-1:2020+A11	ID 1111298742
CE/LVD	EN 62368-1:2014+A11	AN 50669672 0001
RCM	AS/NZS 62368.1:2022	GMA-522234-EA
UKCA	BS EN IEC62368-1:2020+A11:2020	LP24060229C01-17

<b>EMI</b>
CE FCC



### 8.QC CHECK

ALL OF THE QUANTITY SHALL BE CHECKED BEFORE SHIPMENT,CHECK ITEM AS BELOW:

- (1)USB PORT CHECK
- (2)OCP FUNCTION CHECK
- (3)DC OUTPUT VOLTAGE CHECK
- (4)HI-POT&INSULATION CHECK
- (5)OUTLOOKING CHECK




10.LABEL (LASER)

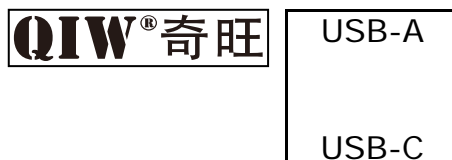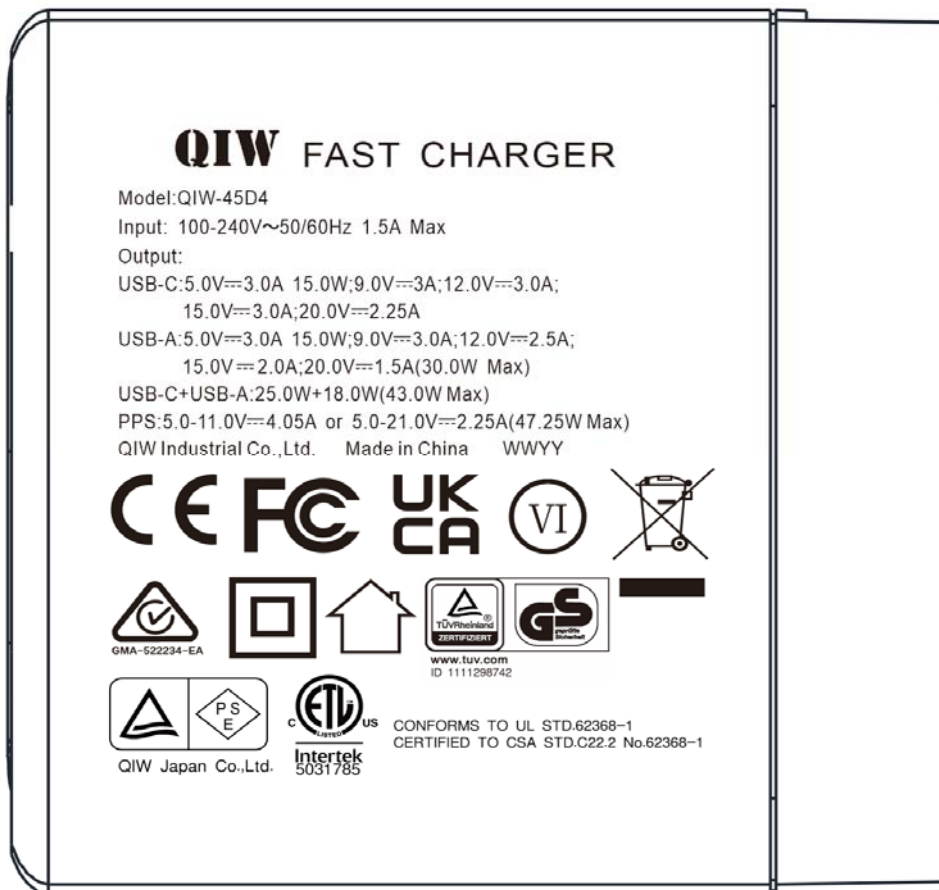


DATE CODE: (WWYY WW=WEEK,YY=YEAR)

TOLERANCE					FINISH	NAME:		LABEL	
L ≤ 4	0.05	0.08	0.1	0.2					
4 < L ≤ 20	0.08	0.1	0.2	0.3	MATERIAL		QTY.	REV	A1
20 < L ≤ 50	0.1	0.15	0.3	0.4					
50 < L ≤ 200	0.15	0.25	0.4	0.6	UNIT		mm	RART NO	Q5-004
200 < L	0.2	0.4	0.5	0.8					
DEG.	CHKD.	APPD.	SCALE		REF.	REM.			
Anni	Aiwei	Thomas							


# 11.PACKING

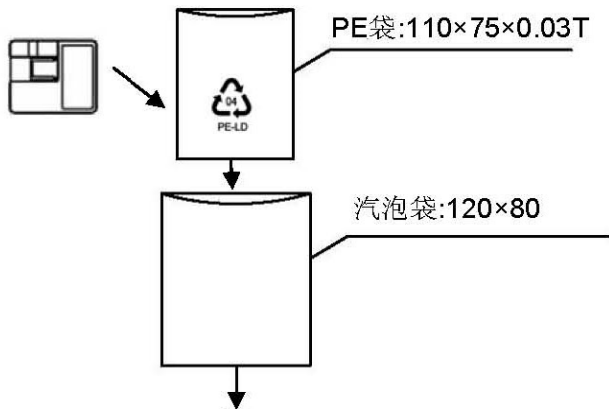

注:PE袋和汽泡袋不要用胶纸固定

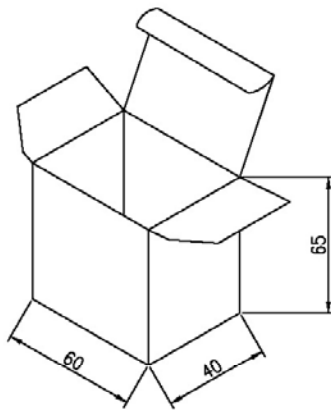

小白盒 500g  
 外徑寸法 長X寬X高  
 60x40x65  
 TOLERANCE:±1  
 一个小白盒内放一个产品

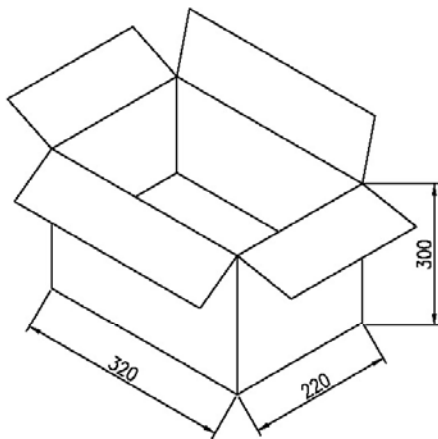

外箱:(K=K)  
 成品100PCS 放入  
 外徑寸法 長X寬X高  
 320X220X300  
 TOLERANCE:±3

TOLERANCE					FINISH	MATERIAL	REV.	A1	NAME	PACKING
L ≤ 4	4 < L ≤ 20	20 < L ≤ 50	50 < L ≤ 200	200 < L						
±0.05	±0.08	±0.1	±0.2	±0.3						
±0.08	±0.1	±0.2	±0.3	±0.4						
±0.1	±0.15	±0.3	±0.4	±0.6						
±0.15	±0.25	±0.4	±0.6	±0.8						
±0.2	±0.4	±0.5	±0.8							
DEG.	CHKD.	APPD.	SCALE	UNIT	mm					
Anni				REF.						
				DWG NO.					PART NO.	

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

**Applicant:** QIW Industrial Co., Ltd.

**Manufacturer:** QIW Industrial Co., Ltd.

**Address:** B1001, No.15-3, Tantou 1st Village,  
Songgang Town, Baoan District,  
SHENZHEN CITY

**Address:** B1001, No.15-3, Tantou 1st Village,  
Songgang Town, Baoan District,  
SHENZHEN CITY

**Country:** China

**Country:** China

**Party Authorized To Apply Mark:** Same as Manufacturer  
**Report Issuing Office:** Intertek Testing Services Shenzhen Limited Guangzhou Branch

**Control Number:** 5031785

**Authorized by:** \_\_\_\_\_

for L. Matthew Snyder, Certification Manager




This document supersedes all previous Authorizations to Mark for the noted Report Number.

This Authorization to Mark is for the exclusive use of Intertek's Client and is provided pursuant to the Certification agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Authorization to Mark. Only the Client is authorized to permit copying or distribution of this Authorization to Mark and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in the agreement and in this Authorization to Mark. Any further use of the Intertek name for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of assuring appropriate usage of the Certification mark in accordance with the agreement, they are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

Intertek Testing Services NA Inc.  
545 East Algonquin Road, Arlington Heights, IL 60005  
Telephone 800-345-3851 or 847-439-5667 Fax 312-283-1672

<b>Standard(s):</b>	Audio/Video, Information and Communication Technology Equipment - Part 1: Safety Requirements [UL 62368-1:2019 Ed.3+R:22Oct2021]
<b>Product:</b>	FAST CHARGER
<b>Brand Name:</b>	<b>QIW</b>
<b>Models:</b>	QIW- followed by 45 or 65; followed by W, D or U; followed by 1, 2, 3 or 4.



# Attestation Of Conformity

No.: LP24060229C01-04

**Applicant** : QIW Industrial Co.,Ltd.  
**Address** : B1001, No.15-3, Tantou 1st Village, Songgang Town, Baoan District, Shenzhen City, P.R.China  
**Product** : FAST CHARGER  
**Model No.** : QIW-45yz, QIW-65yz  
("y", "z" are variables, see page 4 of the test report for details.)  
**Trade Mark** : **QIW**  
**Test Standard** : 47 CFR FCC Part 15, Subpart B, Class B  
Conducted Emission limits describes at FCC 47 CFR Part 15 Subpart B section 15.107 (a)  
Radiated Emission limits describes at FCC 47 CFR Part 15 Subpart B section 15.109 (a)

In a test laboratory according to FCC rules section 2.948 for measuring devices under Parts 15. Enclosed please find the test report: LP24060229C01-04

This Attestation of conformity is based on an evaluation of a sample of the above mentioned product. The Attestation and test report can be used for demonstration of technical compliance with FCC Equipment Authorization Procedure-Supplier's Declaration of Conformity (SDoC, 47 CFR PART 2 section §2.906). The certificate does not imply assessment of the production and does not permit the use of Lab's logo.



  
Manager: Frank Shen  
Date: 2025-2-24

**Dongguan Lepont Testing Service Co., Ltd.**

Tel.:86-769-83086888 Fax.:86-769-83096886

Room 102, Building 11, No.7, Houjie Science And Technology Avenue, Houjie, Dongguan, Guangdong, China

The statement is based on a single evaluation of one sample of above mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab's logo.

# Zertifikat *Certificate*

**Zertifikatsnummer Certificate No.:**

S 50669542 0001

**Berichtsnummer Report No.:**

CN24K9V8 001

**Genehmigungsinhaber License Holder:**

QIW Industrial Co.,Ltd.  
B1001, No.15-3,  
Tantou 1st Village, Songgang Town, Baoan District,  
Shenzhen,  
518105 Guangdong  
P.R. China

**Fertigungsstätte Manufacturing Site:**

QIW Industrial Co.,Ltd.  
West, 4th Floor, Building A7,  
Xinghuaxiong Science and Technology  
Park, Baihuadong First Industrial Zone,  
Guangming New District,  
Shenzhen  
Guangdong  
P.R. China

**Prüfzeichen Test Mark:**

**Geprüft nach Tested according to:**

EN IEC 62368-1:2020+A11  
EK1 527-12 Rev. 2  
EK1 557-13

**Geräteidentifikation**
**Product Identification**
**Produkt:**

Netzgerät  
(FAST CHARGER)

**Product:**
**Modell:**

Modelle sind auf nächste(r) Seite(n) gelistet

**Type:**

Type designation(s) are listed on the next page(s)

**Technische Daten:**

Nennspannung (Rated Voltage) : AC 100-240V, 50/60Hz

**Technical Data:**

Nennstrom (Rated Current) : 1.5A Max

Schutzklasse (Protection Class) : II

Umgebungstemperatur (Ambient Temperature) : 25°C Max

Höhe (Altitude) : 5000m Max

Ausgang (Output) : Siehe Seite 2 (Refer to page 2)

**Gültig bis:**

2030-03-19

**Date of expiry:**
**Gültig ab:**

2025-03-20

**Valid from:**
**Zertifizierungsstelle:**
**Certification body:**
**Ausstellungsdatum:**

2025-03-20

**Date of issue:**

Dipl.-Ing. Th. Illing



Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde.  
Produkt und Fertigungsstätte erfüllen § 20 des  
Produktsicherheitsgesetzes.

This certificate is based on our Testing and Certification Regulation.  
The provisions of §20 Product Safety Act are complied with.

**TÜV Rheinland LGA Products GmbH, Tillystraße 2, 90431 Nürnberg**
<http://www.tuv.com/safety> E-mail: markcheck@tuv.com

Fax: +49 221 806-3935



# Zertifikat *Certificate*

**Zertifikatsnummer** *Certificate No.:*

S 50669542 0001

**Berichtsnummer** *Report No.:*

CN24K9V8 001

**Produkt** *Product:* Netzgerät  
(FAST CHARGER)

**Modell** *Type:* **Bezeichnung** *Designation:*  
1) QIW-65yz, 2) QIW-45yz  
y = D, E, kennzeichnet verschiedene Steckertyp.  
(means different plug type.)  
z = 1, 2, 3, 4; kennzeichnet verschiedene Ausgangsanschlüsse.  
(means the different output port type.)

Handelsmarke (Trademark) : QIW

DC Output:

1)z = 1:

USB-C: 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A;  
15.0V 3.0A; 20.0V 3.25A (65.0W Max).

PPS: 5.0-11.0V 4.05A or 5.0-21.0V 3.0A (63.0W Max).

1)z = 2:

USB-C1/ C2: 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A;  
15.0V 3.0A; 20.0V 3.25A (65.0W Max.);

USB-C1+USB-C2: 45.0W+20.0W (65.0W);

PPS: 5.0-11.0V 4.05A or 5.0-21.0V 3.0A (63.0W Max).

1)z = 3:

USB-C1/ C2: 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A;  
15.0V 3.0A; 20.0V 3.25A (65.0W Max).;

USB-A: 5.0V 3.0A; 9.0V 3.0A; 12.0V 2.5A;

15.0V 2.0A; 20.0V 1.5A (30.0W Max).;

USB-C1+USB-C2: 45.0W+20.0W (65.0W);

USB-C1+USB-A: 45.0W+18.0W (63.0W);

USB-C2+USB-A: 5.0V 3.0A (15.0W);

USB-C1+(USB-C2+USB-A): 45.0W+ (5.0V 3.0A) (60.0W);

PPS: 5.0-11.0V 4.05A or 5.0-21.0V 3.0A (63.0W Max).

1)z = 4:

USB-C: 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A;  
15.0V 3.0A; 20.0V 3.25A (65.0W Max).;

USB-A: 5.0V 3.0A; 9.0V 3.0A; 12.0V 2.5A;

15.0V 2.0A; 20.0V 1.5A (30.0W Max).;

USB-C+USB-A: 45.0W+18.0W (63.0W);

PPS: 5.0-11.0V 4.05A or 5.0-21.0V 3.0A (63.0W Max).

2)z = 1:

USB-C: 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A; 15.0V 3.0A; 20.0V 2.25A;

PPS: 5.0-11.0V 4.05A or 5.0-21.0V 2.25A (47.25W Max).

2)z = 2:

USB-C1/ C2: 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A;  
15.0V 3.0A; 20.0V 2.25A;

USB-C1+USB-C2: 25.0W+20.0W (45.0W);

PPS: 5.0-11.0V 4.05A or 5.0-21.0V 2.25A (47.25W Max).

2)z = 3:

USB-C1/ C2: 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A;  
15.0V 3.0A; 20.0V 2.25A;

USB-A: 5.0V 3.0A; 9.0V 3.0A; 12.0V 2.5A;

15.0V 2.0A; 20.0V 1.5A (30.0W Max).;





# Zertifikat *Certificate*

**Zertifikatsnummer** *Certificate No.:*

S 50669542 0001

**Berichtsnummer** *Report No.:*

CN24K9V8 001

**Produkt** *Product:* Netzgerät  
(FAST CHARGER)

**Modell** *Type:*

**Bezeichnung** *Designation:*

USB-C1+USB-C2: 25.0W+20.0W (45.0W);

USB-C1+USB-A: 25.0W+18.0W (43.0W);

USB-C2+USB-A: 5.0V 3.0A (15.0W);

USB-C1+(USB-C2+USB-A): 25.0W+ (5.0V 3.0A) (40.0W);

PPS: 5.0-11.0V 4.05A or 5.0-21.0V 2.25A (47.25W Max).

2)z = 4:

USB-C: 5.0V 3.0A; 9.0V 3.0A; 12.0V 3.0A; 15.0V 3.0A; 20.0V 2.25A;

USB-A: 5.0V 3.0A; 9.0V 3.0A; 12.0V 2.5A;

15.0V 2.0A; 20.0V 1.5A (30.0W Max).;

USB-C+USB-A: 25.0W+18.0W (43.0W);

PPS: 5.0-11.0V 4.05A or 5.0-21.0V 2.25A (47.25W Max).

Vermerk: Bei Multiplikation der Ausgangsspannung und des Ausgangsstroms sind Modellbezeichnungen limitiert durch die max. Ausgangsleistung. (Remark: By multiplication of output voltage and output current the type designations are limited through the max. output power.)

Hinweis: Anforderungen der AfPS GS 2019:01 PAK Klausel 3.1 berücksichtigt. (Remark: Requirements of AfPS GS 2019:01 PAK clause 3.1 considered.)

ANLAGE(Appendix) : 1.0



# CERTIFICATE

## of Conformity

### Low Voltage Directive (EU) 2014/35

**Registration No.:** AN 50669672 0001  
**Report No.:** CN248047 001  
**Holder:** QIW Industrial Co.,Ltd.  
B1001, No.15-3,  
Tantou 1st Village, Songgang Town, Baoan District,  
Shenzhen,  
518105 Guangdong  
P.R. China  
**Product:** Power Supply  
(FAST CHARGER)

#### Type designation listed on the next page

This certificate of conformity is based on an evaluation of a sample of the above-mentioned product. Technical Report and documentation are at the License Holder's disposal. This is to certify that the tested sample is in conformity with Annex I of Council Directive (EU) 2014/35, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorized to use this certificate in connection with the EC declaration of conformity according to Annex IV of the Directive.

**Date:** 2025-03-31

**Certification Body**

Martin Wang



**TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg**

The CE marking may be used if all relevant and effective EC Directives/Regulations are complied with.



# CERTIFICATE

## of Conformity

### Low Voltage Directive (EU) 2014/35

**Registration No.:** AN 50669672 0001

**Product:** Power Supply  
(FAST CHARGER)

**Identification:** Type Designation  
QIW-65yz, QIW-45yz  
(y = D, E, K; z = 1, 2, 3, 4)  
Serial No.: n.a.  
Remark: Refer to test report CN248047 001 for details.  
Tested acc. to: EN 62368-1:2014+A11

QIW®  
www.qiw.com



**TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg**

The CE marking may be used if all relevant and effective EC Directives/Regulations are complied with.

# Certificate of Conformity

No.: LP24060229C01-02

The following products have been tested by us with the listed standards and found in compliance with the council EMC directive 2014/30/EU. It is demonstrative for the compliance with this EMC Directive.

Applicant : QIW Industrial Co.,Ltd.  
Address : B1001, No.15-3, Tantou 1st Village, Songgang Town, Baoan District, Shenzhen City, P.R.China  
Product : FAST CHARGER  
Model No. : QIW-45yz, QIW-65yz  
("y", "z" are variables, see page 4 of the test report for details.)  
Trade Mark : **QIW**  
Test Standards : EN 55032:2015+A11:2020+A1:2020  
EN 55035:2017+A11:2020  
EN IEC 61000-3-2:2019+A1:2021+A2:2024  
EN 61000-3-3:2013+A1:2019+A2:2021



The CE marking may be used if all relevant and effective EC Directives/Regulations are complied with.

  
Manager: Frank Shen  
Date: 2025-2-24

**Dongguan Lepont Testing Service Co., Ltd.**

Tel.:86-769-83086888 Fax.:86-769-83096886

Room 102, Building 11, No.7, Houjie Science And Technology Avenue, Houjie, Dongguan, Guangdong, China

The statement is based on a single evaluation of one sample of above mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab's logo.





# Certificate of Conformity

No.:CCI24080681ENR1CER

Reference Report No. : CCI240800681ENR1

Applicant : QIW Industrial Co.,Ltd.  
Address : B1001, No.15-3, Tantou 1st Village, Songgang Town, Baoan District, Shenzhen City, China

Factory : QIW Industrial Co., Ltd.

Factory Address : B1001, No.15-3, Tantou 1st Village, Songgang Town, Baoan District, Shenzhen City, China

Sample Name : Fast Charger  
Model/Item No. : See next page

Test Standards : IEC 62321-3-1: 2013 IEC 62321-7-1:2015  
IEC 62321-4: 2013+A1:2017 IEC 62321-7-2:2017  
IEC 62321-5: 2013 IEC 62321-8:2017  
IEC 62321-6:2015

The submitted sample(s) stated as above has(have) been tested by us with the listed standards and found in conformity with the requirements stated in Directive 2011/65/EU of the European Parliament and of the Council with regard to the restriction of the use of certain hazardous substances in electrical and electronic equipment and its subsequent amendments as well as Commission Delegated Directive (EU) 2015/863. It is possible to use CE marking on the product to demonstrate the conformity with this Directive.

This certification is part of the full test report(s) and should be read in conjunction with it. The certificate is based on a single evaluation of one sample of above-mentioned products. It does not imply an assessment of the whole production. Other CE marking directives may be applied, they have not been considered during this RoHS conformity assessment.





Model/Item No.:

QIW-65yz; QIW-45yz ('y' can be W, D, E, K, A, U

'W' means American and Japan Folding plug used

'D' means Replaceable plug used

'E' means European Fixed plug used

'K' means United Kingdom Fixed plug used

'U' means American and Japan Fixed plug used

'A' means Australia Fixed plug used

'z' can be 1, 2, 3, 4 means the different output port type.

'1' for USB-C, '2' for USB-C1 and USB-C2, '3' for USB-C1, USB-C2 and USB-A,

'4' for USB-C and USB-A )



Compliance Control Institute (Guangzhou) Co., Ltd

Room 701, Building 2, No.89, Majun Street, Nansha District, Guangzhou, Guangdong, China

Tel: +86-20-84900678 Fax: +86-20-84910993 Email: cs@ccilab.com.cn

Website: www.ccilab.com.cn



# Certificate of Conformity

No.: LP24060229C01-17

The following products have been tested by us with the listed standards and found in compliance with the Electrical Equipment (Safety) Regulations 2016 (UK SI 2016 No. 1101). It is possible to use UKCA marking to demonstrative for the compliance with this regulation.

Applicant : QIW Industrial Co.,Ltd.  
Address : B1001, No.15-3, Tantou 1st Village, Songgang Town, Baoan District, Shenzhen, 518105 Guangdong, P.R. China  
Product : FAST CHARGER  
Trade Mark : **QIW**  
Model No. : QIW-65yz, QIW-45yz (y=D, K; z=1, 2, 3, 4)  
Rated Input : 100-240V~, 50/60Hz, 1.5A Max.  
Rated Output : See model list on test report.  
Test Standards : BS EN IEC 62368-1:2020+A11:2020 Audio/video, information and communication technology equipment  
Part 1: Safety requirements



Manager: Haylen Li  
Date: 2025-03-13

**Dongguan Lepont Testing Service Co., Ltd.**

Tel.: 86-769-8308 6888 Fax.: 86-769-8309 6886  
Room 102, Building 11, No. 7, Houjie Science And Technology  
Avenue, Houjie, Dongguan, Guangdong, China

The statement is based on a single evaluation of one sample of above mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab's logo.

# Certificate of Conformity

No.: LP24060229C01-03

The following products have been tested by us with the listed standards and found in compliance with the council UK EMC Regulations (SI 2016/1091). It is demonstrative for the compliance with this EMC Directive.

Applicant : QIW Industrial Co.,Ltd.  
Address : B1001, No.15-3, Tantou 1st Village, Songgang Town, Baoan District, Shenzhen City, P.R.China  
Product : FAST CHARGER  
Model No. : QIW-45yz, QIW-65yz  
("y", "z" are variables, see page 4 of the test report for details.)  
Trade Mark : **QIW**  
Test Standards : BS EN 55032: 2015+A11:2020+A1:2020  
BS EN IEC 61000-3-2:2019+A1:2021+A2:2024  
BS EN 61000-3-3:2013+A1:2019+A2:2021  
BS EN 55035:2017+A11:2020



The UKCA mark may be used, if all relevant UK Legislations and the UK Declaration of Conformity has been completed.

Manager: Frank Shen  
Date: 2025-2-24

**Dongguan Lepont Testing Service Co., Ltd.**

Tel.:86-769-83086888 Fax.:86-769-83096886

Room 102, Building 11, No.7, Houjie Science And Technology Avenue, Houjie, Dongguan, Guangdong, China

The statement is based on a single evaluation of one sample of above mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab's logo.



# THE RCM LETTER OF AUTHORISATION

(For the RCM Compliance under ACMA )  
-Australian Communications and Media Authority

14 Mar. 2025

**Certificate No.:** RCM251006589R

**To:** QIW Industrial Co., Ltd.

**Address:** B1001, No.15-3, Tantou 1st Village, Songgang Town, Baoan District, Shenzhen, 518105  
Guangdong, P.R. China

Product	Model	Trademark/Brand	Compliance Marking Under ACMA
FAST CHARGER	QIW-65yz, QIW-45yz series	QIW	 Approval No. GMA-522234-EA

This letter authorises the above supplier, to label the product(s) listed above, with the RCM (**Regulatory Compliance Mark**) as shown above, subject to the following conditions:

1. This is to confirm that product(s) listed, comply with ACMA mandated standards and the labelling notice under ACMA arrangement. To mark RCM on this product, it is necessary that the supplier should also hold and maintain an Australian Electrical Safety Certificate and/or conduct EESS registration.
2. The units supplied are identical to those described in the compliance folder held by Compliance Tick Pty Ltd. The supplier(s) agree(s) to abide by the terms and conditions as detailed on the service agreement.
3. Compliance Tick Pty Ltd will hold this compliance folder for at least 5 years.
4. Any modification to the listed product(s) voids this authorisation.
5. This authorisation pertains only to the product(s) listed above.
6. The labelling and supply of the product with the RCM (Regulatory Compliance Mark) is agreed with the above conditions.



**On behalf of Compliance Tick Pty Ltd**

# Supplier's declaration of conformity



This is the Australian Communications and Media Authority (ACMA) approved form for a declaration of conformity under the following legislative instruments:

- > Radiocommunications Equipment (General) Rules 2021
- > Radiocommunications Labelling (Electromagnetic Compatibility) Notice 2017.

This is a sample form for a declaration of conformity under the Telecommunications (Labelling Notice for Customer Equipment and Customer Cabling) Instrument 2015.

## Instructions for completion

**Do not return this form to the ACMA.** This completed form must be retained by the supplier as part of the documentation required for the compliance records. However, it must be made available for inspection by the ACMA when requested.

## Supplier's details (manufacturer, importer/Applicant)

Company name (or individual)

QIW Industrial Co., Ltd.
Trading as

ACN/ARBN

N/A
-----

Street address

B1001, No.15-3, Tantou 1st Village, Songgang Town, Baoan District,
Shenzhen, Guangdong, P.R. China
POSTCODE 518105

or

New Zealand IRDN

N/A
-----

## Australia authorised agent, representative

Company name (or individual)

COMPLIANCE TICK PTY LTD
Trading as

ACN/ARBN

12 625 564 909
----------------

or

New Zealand IRDN

N/A
-----

Street address (Australia or New Zealand)

Se 3, L2 377-383, SUSSEX ST
SYDNEY NSW
POSTCODE 2000

## Product details and date of manufacture

Product description – brand name, type, current model, lot, batch or serial number (if available), software/firmware version (if applicable)

Product: FAST CHARGER
Brand Name: QIW
Model No. QIW-65yz, QIW-45yz Series
Date of manufacture or importation of the original/modified item 03/2025

## Compliance – applicable standards and other supporting documents

Evidence of compliance with applicable standards may be demonstrated by test reports, endorsed/accredited test reports, certification/competent body statements.

Having had regard to these documents, I am satisfied the above-mentioned product complies with the requirements of the relevant ACMA standards made under the *Radiocommunications Act 1992* and/or the *Telecommunications Act 1997*.

List these documents including details of the standard title, number and, if applicable, number of the test report/endorsed test report or certification/competent body statement.

EN 55032:2015+A11:2020+A1:2020, EN 55035:2017+A11:2020, EN IEC 61000-3-2:2019+A1:2021+A2:2024, EN 61000-3-3:2013+A1:2019+A2:2021
Test report: LP24060229C01-02
Tested by Dongguan Lepont Testing Service Co., Ltd


## Declaration

I hereby declare that:

1. I am authorised to make this declaration on behalf of the Company mentioned above
2. the contents of this form are true and correct
3. the product mentioned above complies with the applicable above mentioned standards and all products supplied under this declaration will be identical to the product identified above
4. I understand that giving false or misleading information is a serious offence.

**Note:** It is an offence to knowingly provide false or misleading information to a Commonwealth entity or a person who is exercising powers, performing functions under, or in connection with, a law of the Commonwealth. It is an offence to knowingly provide false or misleading information or documents in compliance or purported compliance with a law of the Commonwealth. (See sections 137.1 and 137.2 of the *Criminal Code Act 1995*.)

Penalty: 12 months imprisonment

 SIGNATURE OF SUPPLIER OR AGENT	Acting Manager POSITION IN ORGANISATION
Dominic Ng on behalf of Compliance Tick Pty Ltd	DATE 14/03/2025

The *Privacy Act 1988* (Cth) (the Privacy Act) imposes obligations on the ACMA in relation to the collection, security, quality, access, use and disclosure of personal information. These obligations are detailed in the Australian Privacy Principles.

The ACMA may only collect personal information if it is reasonably necessary for, or directly related to, one or more of the ACMA's functions or activities.

The purpose of collecting the personal information in this form is to ensure the supplier is identified in the 'declaration of conformity'. If this declaration of conformity is not completed and the requested information is not provided, a compliance label cannot be applied.

Further information on the Privacy Act and the ACMA's privacy policy is available at [www.acma.gov.au/privacypolicy](http://www.acma.gov.au/privacypolicy). The privacy policy contains details about how you may access personal information about you that is held by the ACMA, and seek the correction of such information. It also explains how you may complain about a breach of the Privacy Act and how we will deal with such a complaint.

Should you have any questions in this regard, please contact the ACMA's privacy contact officer on telephone on 1800 226 667 or by email at [privacy@acma.gov.au](mailto:privacy@acma.gov.au).

# Certificate of Conformity

Global-Mark Pty. Ltd., certify the electrical equipment described hereunder complies with standards listed herein and notifies the certificate holder to affix the authorised Approval Mark on the product of the same type and the Regulatory Compliance Mark (RCM) mark provided that the requirements of all relevant parts of AS/NZS 4417 applicable to the article are fulfilled. In placing the Approval and RCM mark on the product, the Responsible Supplier makes a declaration of compliance with the certification standard(s) and confirms that the product is identical to the product certified herein. – This Certificate meets the requirements of a Recognised External Certification Scheme (EESS- RECS) and a Recognised External Approval Scheme (NSW-REAS).

## CERTIFICATION AND CERTIFICATE HOLDER DETAILS

Company Name	<b>QIW Industrial Co., Ltd.</b>	Other Name	
Address	<b>B1001, No.15-3, Tantou 1st Village, Songgang Town, Baoan District, Shenzhen Guangdong 518105 China</b>		
Client ID	<b>110943</b>	Global-Mark File Number:	<b>110943-001</b>
Certificate Number & Approval Mark	<b>GMA-522234-EA</b>	Revision Number	<b>00</b>
Certification Standard(s)	<b>AS/NZS 62368.1:2022 Audio/video, information and communication technology equipment - Safety requirements</b>		
Type of Certification	<b>Electrical Safety Product</b>	Scheme	<b>Global-Mark Electrical Product Safety Certification Scheme</b>

## CERTIFICATE DATES

Certificate Issue Date	<b>13/03/2025</b>
Certificate Last Update Date	
Certification Expiry Date	<b>13/03/2030</b>

This certification remains valid until the above-mentioned expiry date and subject to the organisation's continued compliance with the certification standard, and Global-Mark's Terms and Conditions. This Certificate of Conformity remains the property of Global-Mark Pty Ltd, Company Number: ACN.108-087-654. The use of the Accreditation Mark indicates accreditation by the Joint Accreditation System of Australia and New Zealand in respect to those activities covered by JAS-ANZ accreditation. Refer to [www.jasanz.org/register](http://www.jasanz.org/register) for verification.



**Certification Manager**



# Certificate of Conformity

CERTIFIED ELECTRICAL EQUIPMENT				
Declared Article	Product Description	Trade Name	Model Number	Rating
Power Supply or Charger	FAST CHARGER	QIW	QIW-45D1	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,2.25A PPS:5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,2.25A (47.25W Max)
Power Supply or Charger	FAST CHARGER	QIW	QIW-45D2	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C1/C2: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,2.25A USB-C1+USB-C2: 25.0W+20.0W(45.0W); PPS:5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,2.25A (47.25W Max)
Power Supply or Charger	FAST CHARGER	QIW	QIW-45D3	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C1/C2: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,3.25A USB-A: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,2.5A ; 15.0Vdc,2.0A ; 20.0Vdc,1.5A (30.0W Max) ; USB-C1+USB-C2: 25.0W+20.0W(45.0W) ; USB-C1+USB-A: 25.0W+18.0W(43.0W) ; USB-C2+USB-A: 5.0Vdc,3.0A(15.0W) ; USB-C1+(USB-C2+USB-A):25.0W+(5.0Vdc,3.0A) (40.0W) PPS:5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,2.25A (47.25W Max)
Power Supply or Charger	FAST CHARGER	QIW	QIW-45D4	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,2.25A USB-A: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,2.5A ; 15.0Vdc,2.0A ; 20.0Vdc,1.5A (30.0W Max) ; USB-C+USB-A: 25.0W+18.0W(43.0W) ; PPS: 5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,2.25A (47.25W Max)

This certification remains valid until the above-mentioned expiry date and subject to the organisation's continued compliance with the certification standard, and Global-Mark's Terms and Conditions. This Certificate of Conformity remains the property of Global-Mark Pty Ltd, Company Number: ACN.108-087-654. The use of the Accreditation Mark indicates accreditation by the Joint Accreditation System of Australia and New Zealand in respect to those activities covered by JAS-ANZ accreditation. Refer to [www.jasanz.org/register](http://www.jasanz.org/register) for verification.



**Certification Manager**






global-mark®

# Certificate of Conformity

Power Supply or Charger	FAST CHARGER	QIW	QIW-45A1	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,2.25A PPS:5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,2.25A (47.25W Max)
Power Supply or Charger	FAST CHARGER	QIW	QIW-45A2	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C1/C2: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,2.25A USB-C1+USB-C2: 25.0W+20.0W(45.0W); PPS:5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,2.25A (47.25W Max)
Power Supply or Charger	FAST CHARGER	QIW	QIW-45A3	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C1/C2: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,3.25A USB-A: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,2.5A ; 15.0Vdc,2.0A ; 20.0Vdc,1.5A (30.0W Max) ; USB-C1+USB-C2: 25.0W+20.0W(45.0W) ; USB-C1+USB-A: 25.0W+18.0W(43.0W) ; USB-C2+USB-A: 5.0Vdc,3.0A(15.0W) ; USB-C1+(USB-C2+USB-A):25.0W+(5.0Vdc,3.0A) (40.0W) PPS:5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,2.25A (47.25W Max)
Power Supply or Charger	FAST CHARGER	QIW	QIW-45A4	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,2.25A USB-A: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,2.5A ; 15.0Vdc,2.0A ; 20.0Vdc,1.5A (30.0W Max) ; USB-C+USB-A: 25.0W+18.0W(43.0W) ; PPS: 5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,2.25A (47.25W Max)

This certification remains valid until the above-mentioned expiry date and subject to the organisation's continued compliance with the certification standard, and Global-Mark's Terms and Conditions. This Certificate of Conformity remains the property of Global-Mark Pty Ltd, Company Number: ACN.108-087-654. The use of the Accreditation Mark indicates accreditation by the Joint Accreditation System of Australia and New Zealand in respect to those activities covered by JAS-ANZ accreditation. Refer to [www.jasanz.org/register](http://www.jasanz.org/register) for verification.



Certification Manager



JAS-ANZ





# Certificate of Conformity

Power Supply or Charger	FAST CHARGER	QIW	QIW-65D1	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,3.25A (65.0W Max) PPS:5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,3.0A (63.0W Max)
Power Supply or Charger	FAST CHARGER	QIW	QIW-65D2	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C1/C2: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,3.25A (65.0W Max) USB-C1+USB-C2: 45.0W+20.0W(65.0W); PPS: 5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,3.0A (63.0W Max)
Power Supply or Charger	FAST CHARGER	QIW	QIW-65D3	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C1/C2: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,3.25A (65.0W Max) USB-A: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,2.5A ; 15.0Vdc,2.0A ; 20.0Vdc,1.5A (30.0W Max) ; USB-C1+USB-C2: 45.0W+20.0W(65.0W) ; USB-C1+USB-A: 45.0W+18.0W(63.0W) ; USB-C2+USB-A:5.0Vdc,3.0A(15.0W) ; USB-C1+(USB-C2+USB-A):45.0W+(5.0Vdc,3.0A) (60.0W) PPS: 5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,3.0A (63.0W Max)

This certification remains valid until the above-mentioned expiry date and subject to the organisation's continued compliance with the certification standard, and Global-Mark's Terms and Conditions. This Certificate of Conformity remains the property of Global-Mark Pty Ltd, Company Number: ACN.108-087-654. The use of the Accreditation Mark indicates accreditation by the Joint Accreditation System of Australia and New Zealand in respect to those activities covered by JAS-ANZ accreditation. Refer to [www.jasanz.org/register](http://www.jasanz.org/register) for verification.



**Certification Manager**

Page 4 of 6

# Certificate of Conformity

Power Supply or Charger	FAST CHARGER	QIW	QIW-65D4	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,3.25A (65.0W Max) USB-A: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,2.5A ; 15.0Vdc,2.0A ; 20.0Vdc,1.5A (30.0W Max) ; USB-C+USB-A: 45.0W+18.0W(63.0W) ; PPS: 5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,3.0A (63.0W Max)
Power Supply or Charger	FAST CHARGER	QIW	QIW-65A1	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,3.25A (65.0W Max) PPS:5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,3.0A (63.0W Max)
Power Supply or Charger	FAST CHARGER	QIW	QIW-65A2	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C1/C2: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,3.25A (65.0W Max) USB-C1+USB-C2: 45.0W+20.0W(65.0W); PPS: 5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,3.0A (63.0W Max)

This certification remains valid until the above-mentioned expiry date and subject to the organisation's continued compliance with the certification standard, and Global-Mark's Terms and Conditions. This Certificate of Conformity remains the property of Global-Mark Pty Ltd, Company Number: ACN.108-087-654. The use of the Accreditation Mark indicates accreditation by the Joint Accreditation System of Australia and New Zealand in respect to those activities covered by JAS-ANZ accreditation. Refer to [www.jasanz.org/register](http://www.jasanz.org/register) for verification.



Certification Manager



# Certificate of Conformity

Power Supply or Charger	FAST CHARGER	QIW	QIW-65A3	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C1/C2: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,3.25A (65.0W Max) USB-A: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,2.5A ; 15.0Vdc,2.0A ; 20.0Vdc,1.5A (30.0W Max) ; USB-C1+USB-C2: 45.0W+20.0W(65.0W) ; USB-C1+USB-A: 45.0W+18.0W(63.0W) ; USB-C2+USB-A: 5.0Vdc,3.0A(15.0W) ; USB-C1+(USB-C2+USB-A):45.0W+(5.0Vdc,3.0A) (60.0W) PPS: 5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,3.0A (63.0W Max)
Power Supply or Charger	FAST CHARGER	QIW	QIW-65A4	Input:100-240v~,50/60Hz,1.5A Max Output:USB-C: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,3.0A ; 15.0Vdc,3.0A ; 20.0Vdc,3.25A (65.0W Max) USB-A: 5.0Vdc,3.0A ; 9.0Vdc,3.0A ; 12.0Vdc,2.5A ; 15.0Vdc,2.0A ; 20.0Vdc,1.5A (30.0W Max) ; USB-C+USB-A: 45.0W+18.0W(63.0W) ; PPS: 5.0-11.0Vdc,4.05A or 5.0-21.0Vdc,3.0A (63.0W Max)

## RELEVANT TRADEMARK (S)

## COMMENTS OR CONDITIONS ON THE CERTIFICATION

2025/03/13 Initial Certification  
 - plug portion complies with AS/NZS 3112:2017 + A1  
 - for use with AV/IT equipment

End of document

This certification remains valid until the above-mentioned expiry date and subject to the organisation's continued compliance with the certification standard, and Global-Mark's Terms and Conditions. This Certificate of Conformity remains the property of Global-Mark Pty Ltd, Company Number: ACN.108-087-654. The use of the Accreditation Mark indicates accreditation by the Joint Accreditation System of Australia and New Zealand in respect to those activities covered by JAS-ANZ accreditation. Refer to [www.jasanz.org/register](http://www.jasanz.org/register) for verification.



Certification Manager

## Search

Select what you want to search for below:

- Certificates  Equipment Registrations  Responsible Supplier

### > Certificates

<b>Certificate Number</b> <small>?</small> <input type="text" value="GMA-522234-EA"/>	<b>Model</b> <small>?</small> <input type="text"/>	<b>Trade Name</b> <small>?</small> <input type="text"/>
<b>Certificate Applicant Company (Business Name)</b> <input type="text"/>	<b>Certificate Applicant Company (Trading Name)</b> <input type="text"/>	
<b>Certifier</b> <input type="text"/>	<b>Certificate Status</b> <input type="text" value="Select..."/>	<b>Expiry Date From</b> <input type="text"/>
<b>Expiry Date To</b> <input type="text"/>		
<b>Equipment Class</b> <input type="text" value="Select"/>	<b>Equipment Type (Level 2/3 Equipment)</b> <input type="text" value="Select"/>	<b>Equipment Type (Level 1/Not In-Scope Equipment)</b> <input type="text" value="Please type in Equipment Type"/>
<b>Equipment Generic Name</b> <input type="text"/>		
<input type="button" value="Search"/>	<input type="button" value="Clear"/>	

Group Fields Refresh

Certificate number	Status	Certification Applicant Company	Equipment level	Equipment type	Generic Name	Expiry date	Certifier
<a href="#">GMA-522234-EA</a>	Approved	QIW Industrial Co., Ltd.	Level 3	Power supply or charger		13/03/2030	Glo



GMA-522234-EA

[View Certificate](#)

Global Mark Australia

Certificate no. GMA-522234-EA

## Certificate of Conformity Details

This is not the actual certificate issued by Global Mark Australia. For the actual certificate contact Global Mark Australia.

**Certificate holder business name**

QIW Industrial Co., Ltd.

**Date first issued**

13/03/2025

**Certificate holder trade name**

QIW Industrial Co., Ltd.

**Date of expiry**

13/03/2030

**Equipment level**

Level 3

**Conditions of certification**

2025/03/13 Initial Certification

**Equipment class**

Power supply or charger

- plug portion complies with AS/NZS 3112:2017 + A1

- for use with AV/IT equipment

**Equipment sub-class**

--

**Generic name of equipment**

--

[Regulatory details](#)[Equipment](#)**EESS required marking****Relevant standards**

AS/NZS 62368.1 2022

**✓ Compliant to Australia and New Zealand standards**

\* Electrical equipment covered by this certificate must comply in all respects with the certified article, and prior to being supplied or offered for supply, must be clearly and indelibly marked with the Regulatory Compliance Mark (RCM) provided that the requirements of all relevant parts of AS/NZS 4417 applicable to the article are fulfilled.

Equipment Number ?

Model ?

Trade Name ?

Certificate Number ?

Equipment Class

Equipment Type (Level 2/3 Equipment)

Equipment Type (Level 1/Not In-Scope Equipment)

Status

Supplier Number

Business Name

Trading Name

Generic Name

Search

Clear

☰ Group

🗖 Fields

🔄 Refresh

Equipment Number



Equipment Type



Generic Name



Equipment Profile



Expiry Date



Status



Equipment Class



Trading Name



E2025004019

Power supply or charger

13/03/2030

Registered

Level 3



## Filters



### Certificate Holder

GMA-522234-EA i

Organisation Name i

Certificate Holder i

Suburb / City i

Country i

### Certification Details

Accredited Body i

Type of certification i

ISIC Code i

### Certification

Scheme i

Standard i

Certification Description i

→ SEARCH

→ RESET

## We have found 1 certifications

Certificate ID	Certified By	Organisation Name	Scope	Suburb/ City	Country	Status
----------------	--------------	-------------------	-------	--------------	---------	--------

GMA-522234-EA	Global-Mark Pty Ltd	<a href="#">QIW Industrial Co., Ltd.</a>	EPSCS-GM:AS/NZS 62368.1:2022	Shenzhen	China	Active
---------------	---------------------	--	------------------------------	----------	-------	--------

### Details

### Scope

<b>Type of Certification</b>	Product Certification
<b>Status</b>	Active
<b>Organisation Name</b>	QIW Industrial Co., Ltd.
<b>Suburb / City</b>	Shenzhen
<b>Country</b>	China
<b>Certification Description</b>	Product Certification, refer to product listing
<b>Current Certification Date</b>	13/03/2025
<b>Certification Expiry Date</b>	13/03/2030

